

## NFG MS (785 260)

- Safe, fast and easy refilling procedure
- Transparent insulating refilling lance for enhanced safety



Figure without obligation

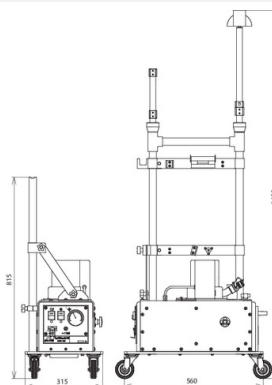


Figure without obligation

Type	NFG MS
Part No.	785 260
Nominal voltage (U <sub>N</sub> )	Up to 36 kV
Frequency range	15 ... 60 Hz
Nominal capacity	1200 W
Supply voltage	230 V
Frequency	50 Hz
Reservoir size	5 litres
Heating control range	0 °C ... +120 °C
Indicating range (temperature measurement)	0 °C ... +120 °C
Dimensions	560 x 315 x 1490 mm
Standard	Based on DIN VDE 0681-1 and DIN VDE 0682-621
Use	Not suitable for use in wet weather conditions
Weight	21,5 kg
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364110304
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.