


PV 5.12.5 SKM8X45 GSG CUGALSN (306 105)



Figure without obligation

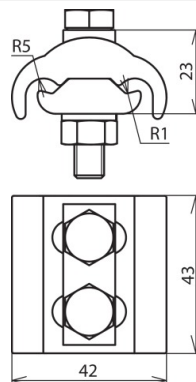

Clamp with spring washer for connecting/linking of round conductors/cables in explosion-hazardous areas zone 1/21, 2/22. The clamp is secured against self-loosening according to DIN EN 62305-3 Supplement 2.

Type	PV 5.12.5 SKM8X45 GSG CUGALSN
Part No.	306 105
Material of clamp	Cu/gal Sn
Clamping range Rd / Rd	5-12.5 mm
Clamping range (stranded or cable)	16-95 mm ²
Screw	☿● M8 x 45 mm
Material of screw / nut	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
ASTM / AISI:	316Ti / 316L / 316
Type	with spring washer
Lightning impulse current (10/350 μs) non-sparking	25 kA
Short-circuit current (50 Hz) (0.1 s) non-sparking	1.65 kA
Standard	based on EN 62561-1
Weight	242 g
Customs tariff number (Comb. Nomenclature EU)	85369010
GTIN	4013364269125
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.