


**PV 5.16 SKM10X50 GSG CUGALSN (306 106)**



Figure without obligation

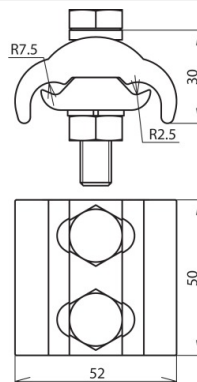

Clamp with spring washer for connecting/linking of round conductors/cables in explosion-hazardous areas zone 1/21, 2/22.. The clamp is secured against self-loosening in accordance with DIN EN 62305-3 Supplement 2.

Type	PV 5.16 SKM10X50 GSG CUGALSN
Part No.	306 106
Material of clamp	Cu/gal Sn
Clamping range Rd / Rd	5-16 mm
Clamping range (stranded or cable)	16-150 mm <sup>2</sup>
Screw	M10 x 50 mm
Material of screw / nut	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
Type	with spring washer
Lightning impulse current (10/350 µs) non-sparking	25 kA
Short-circuit current (50 Hz) (0.1 s) non-sparking	1.65 kA
Standard	based on EN 62561-1
Weight	420 g
Customs tariff number (Comb. Nomenclature EU)	85369010
GTIN	4013364269149
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.