
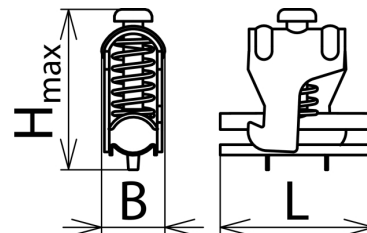


SAK 10 AS V4A (308 403)

- System for anchor bars which is capable of carrying lightning currents
- Large-area shield support
- Compensates the yield of cable materials



Figure without obligation



Dimension drawing SAK

Shield terminals for earthing cable shields on anchor bars. Suitable for lightning equipotential bonding. Can be subsequently installed without interrupting the cable shield or requiring tools for installation. Approved for use in nuclear plants with TÜV test certificate ETL 10/PB 301/97 (TÜV = German Technical Inspectorate).

Type	SAK 10 AS V4A
Part No.	308 403
Lightning impulse current carrying capability (10/350 µs)	10 kA
Clamping range (Rd)	5-10 mm
Material	StSt
Spring pressure	21-27 N
For mounting on	anchor bars
Dimensions (W x L x H)	16 x 40 x 48 mm
Approvals	ETL 10/PB 301/97
Weight	26 g
Customs tariff number (Comb. Nomenclature EU)	85369095
GTIN	4013364070509
PU	10 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.