


## DSE MOD 220 (971 002)


- Spark gap technology particularly suited for use in d.c. circuits
- Operating state / fault indication by green / red indicator flags in the inspection window
- Easy replacement of protection modules without tools due to module locking system with module release button



Figure without obligation



Basic circuit diagram DSE MOD 220

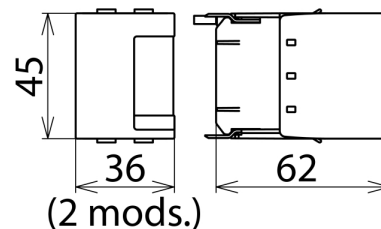

Dimension drawing DSE MOD 220

Spark-gap-based protection module

Type	DSE MOD 220
Part No.	971 002
Max. continuous operating voltage (d.c.) ( $U_c$ )	220 V
Lightning impulse current (10/350 $\mu$ s) ( $I_{imp}$ )	25 kA
Specific energy (W/R)	156.25 kJ/ohms
Weight	106 g
Customs tariff number (Comb. Nomenclature EU)	85363090
GTIN	4013364133655
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.