


DG MOD E H LI 275 (952 900)


- Three-step "Lifetime Indication" (green-yellow-red)
- Prompts the user in time <YELLOW> to replace the protection module in case of imminent arrester overload --> early warning system
- The arrester is fully operational until the protection module is replaced and is thus suited for use in condition monitoring systems



Figure without obligation



Basic circuit diagram DG MOD E H LI 275

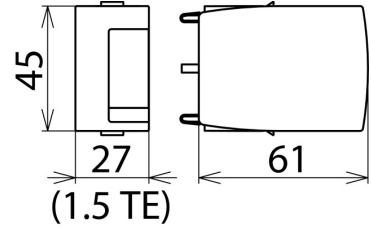

Dimension drawing DG MOD E H LI 275

Varistor-based protection module for DEHNgard SE H LI ... FM

Type	DG MOD E H LI 275
Part No.	952 900
Nominal discharge current (8/20 μ s) (I_n)	30 kA
Max. discharge current (8/20 μ s) (I_{max})	65 kA
Max. continuous operating voltage (a.c.) (U_c)	275 V
Weight	80 g
Customs tariff number (Comb. Nomenclature EU)	85363030
GTIN	4013364158801
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.