


## DCOR L 1P 320 (900 433)


- Visual fault indication
- Compact design
- For use in flush-mounted systems, cable ducts and flush-type boxes



Figure without obligation



Basic circuit diagram DCOR L 1P 320

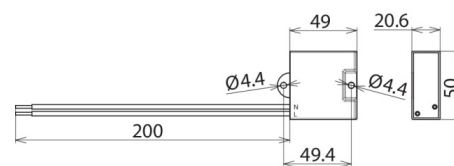

Dimension drawing DCOR L 1P 320

Surge arrester for all installation systems; compact design.

Type	DCOR L 1P 320
Part No.	900 433
SPD according to EN 61643-11 / IEC 61643-11	type 2 / class II
Energy coordination with terminal equipment ( $\leq 10$ m)	type 2 + type 3
Nominal voltage (a.c.) ( $U_N$ )	230 / 277 V (50 / 60 Hz)
Max. continuous operating voltage (a.c.) [L-N] ( $U_C$ )	320 V (50 / 60 Hz)
Nominal discharge current (8/20 $\mu$ s) ( $I_n$ )	5 kA
Max. discharge current (8/20 $\mu$ s) ( $I_{max}$ )	10 kA
Voltage protection level [L-N] ( $U_P$ )	$\leq 1.75$ kV
Response time [L-N] ( $t_A$ )	$\leq 25$ ns
Max. mains-side overcurrent protection	25 A gG
Short-circuit withstand capability for mains-side overcurrent protection ( $I_{SCCR}$ )	25 kA <sub>rms</sub>
Temporary overvoltage (TOV) [L-N] ( $U_T$ ) – Characteristic	335 V / 5 sec. – withstand
Temporary overvoltage (TOV) [L-N] ( $U_T$ ) – Characteristic	440 V / 120 min. – safe failure
Operating state / fault indication	green / red
Number of ports	1
Operating temperature range ( $T_U$ )	-40 °C ... +80 °C
Connecting wires	1.5 mm <sup>2</sup> , 200 mm long
Enclosure material	thermoplastic, red, UL 94 V-2
Place of installation	indoor installation
Degree of protection of installed device	IP 20
Approvals	KEMA
Weight	48 g
Customs tariff number (Comb. Nomenclature EU)	85363030
GTIN	4013364157316
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.