


PHE3 PK6 20 S SB ZK (767 921)

- With universal gear coupling
- Detachable test prod

Figure without obligation

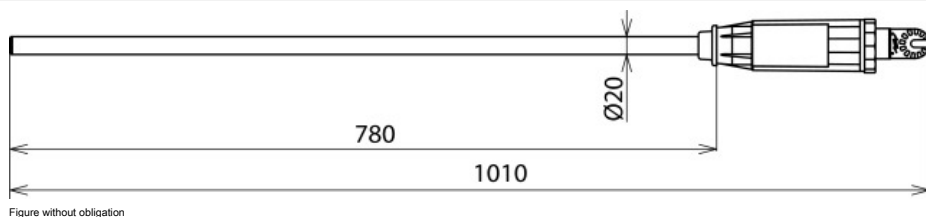

With standby function

| Type | PHE3 PK6 20 S SB ZK |
|---|---|
| Part No. | 767 921 |
| Nominal voltage (U _N) | 6 ... 20 kV |
| Type of voltage | a.c. |
| Frequency | 50 Hz |
| Category | S |
| Total length (l _G) | 1010 mm |
| Insertion depth (l ₀) | 780 mm |
| Length (indicator with test prod) | 230 mm |
| Standard (indicator with test prod) | EN/IEC 61243-1 (DIN VDE 0682-411) |
| Standard (universal gear coupling) | EN/IEC 60832 (DIN VDE 0682-211) |
| Temperature range | -25 °C ... +55 °C, climatic category N |
| Design | Separate |
| For use at | ▲ |
| For | Indoor and outdoor installations |
| Application | Switchgear installations and overhead lines |
| Version | Single-pole |
| Indication | Acoustic and visual |
| Self-testing element | Yes |
| Material (test electrode) | Copper alloy/gal Sn |
| Material (test prod) | Glass-fibre reinforced epoxy resin tube |
| Material (indicator) | Plastic, fully insulated |
| Weight | 1,65 kg |
| Customs tariff number (Comb. Nomenclature EU) | 90303330 |
| GTIN | 4013364097360 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.