


PHE 3 20 S FU 1P (767 416)

- Easy transport due to detachable insulating stick

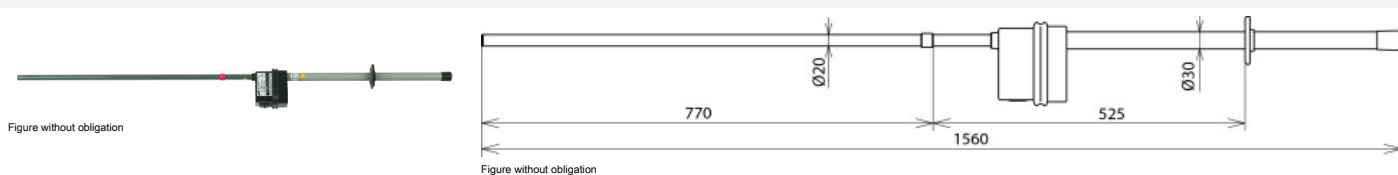

For three-phase systems and single-ended monophas switchgear installations

| Type | PHE 3 20 S FU 1P |
|---|---|
| Part No. | 767 416 |
| Nominal voltage (U _N) | 3 ... 20 kV |
| Type of voltage | a.c. |
| Frequency | 16.7 and 50 Hz |
| Total length (l _Σ) | 1560 mm |
| Insertion depth (l _o) | 770 mm |
| Insulating clearance (l _i) | 525 mm |
| Length (test prod) | 995 mm |
| Length of the operating stick (with hand guard) | 665 mm |
| Standard | EN/IEC 61243-1 (DIN VDE 0682-411) |
| Temperature range | -25 °C ... +55 °C, climatic category N |
| Design | Complete |
| For use at | |
| For | Indoor and outdoor installations |
| Application | Switchgear installations and overhead lines |
| Design | Single-pole |
| Indication | Visual |
| Self-testing element | Yes |
| Material (test prod) | Glass-fibre reinforced epoxy resin tube |
| Material (test electrode) | Copper alloy/gal Sn |
| Material (indicator) | Plastic, fully insulated |
| Material (insulating stick) | Glass-fibre reinforced polyester tube |
| DB drawing No. | 3 Ebgw 02.54 |
| DB material No. | 743 361 |
| Weight | 2,62 kg |
| Customs tariff number (Comb. Nomenclature EU) | 90303330 |
| GTIN | 4013364084247 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.