


## PHE 30 S (767 438)

- Easy transport due to detachable insulating stick

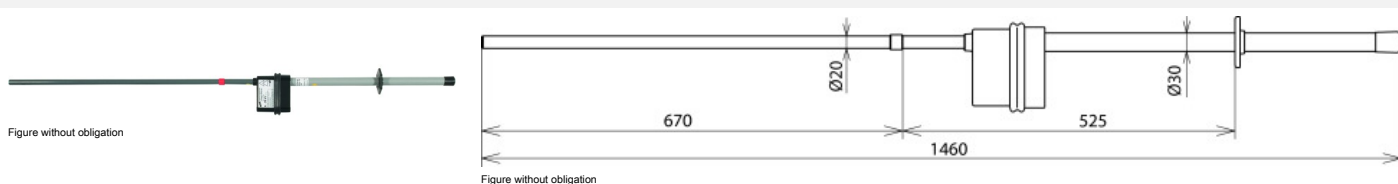

Type	PHE 30 S
Part No.	767 438
Nominal voltage (U <sub>N</sub> )	30 kV
Type of voltage	a.c.
Frequency	50 Hz
Total length (l <sub>c</sub> )	1460 mm
Insertion depth (l <sub>o</sub> )	670 mm
Material (indicator with test prod) (l <sub>s</sub> )	895 mm
Standard	EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Complete
For use at	
For	Indoor and outdoor installations
Application	Switchgear installations and overhead lines
Design	Single-pole
Indication	Visual
Self-testing element	Yes
Material (test prod)	Glass-fibre reinforced epoxy resin tube
Material (test electrode)	Copper alloy/gal Sn
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
Weight	1,6 kg
Customs tariff number (Comb. Nomenclature EU)	90303330
GTIN	4013364135628
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.