


PHE 6 20 S (767 420)

- Easy transport due to detachable insulating stick

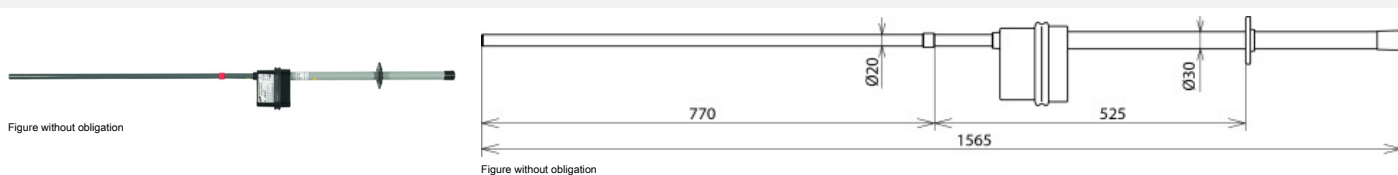

| Type Part No. | PHE 6 20 S 767 420 |
|---|---|
| Nominal voltage (U _N) | 6 ... 20 kV |
| Type of voltage | a.c. |
| Frequency | 50 Hz |
| Total length (l _∅) | 1565 mm |
| Insertion depth (l _o) | 770 mm |
| Material (indicator with test prod) (l _s) | 995 mm |
| Standard | EN/IEC 61243-1 (DIN VDE 0682-411) |
| Temperature range | -25 °C ... +55 °C, climatic category N |
| Design | Complete |
| For use at | |
| For | Indoor and outdoor installations |
| Application | Switchgear installations and overhead lines |
| Design | Single-pole |
| Indication | Visual |
| Self-testing element | Yes |
| Material (test prod) | Glass-fibre reinforced epoxy resin tube |
| Material (test electrode) | Copper alloy/gal Sn |
| Material (indicator) | Plastic, fully insulated |
| Material (insulating stick) | Glass-fibre reinforced polyester tube |
| Weight | 2,38 kg |
| Customs tariff number (Comb. Nomenclature EU) | 90303330 |
| GTIN | 4013364093980 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.