


PHE U 3 30 S (767 433)

- Easy transport due to detachable insulating stick

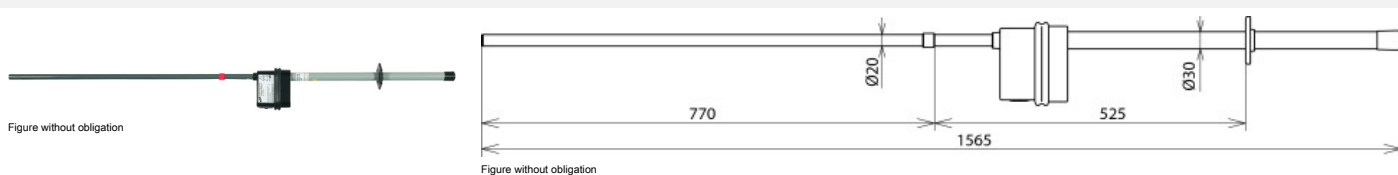

Type Part No.	PHE U 3 30 S 767 433
Nominal voltage (U _N)	3 ... 10 / 6 ... 20 / 15 ... 30 kV
Type of voltage	a.c.
Frequency	50 Hz
Total length (l _o)	1565 mm
Insertion depth (l _i)	770 mm
Material (indicator with test prod) (l _s)	995 mm
Standard	EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Complete
For use at	
For	Indoor and outdoor installations
Application	Switchgear installations and overhead lines
Design	Single-pole
Indication	Visual
Self-testing element	Yes
Material (test prod)	Glass-fibre reinforced epoxy resin tube
Material (test electrode)	Copper alloy/gal Sn
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
Weight	2,4 kg
Customs tariff number (Comb. Nomenclature EU)	90303330
GTIN	4013364094000
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.