

ASSN 36 STK 30 (766 326)

- Easy transport due to anti-rotation plastic plug-in coupling
- For use as switching stick, operating stick or earthing stick
- Kits delivered in a transport case



Figure without obligation

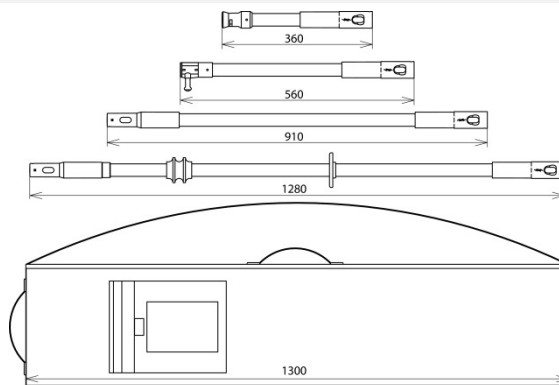


Figure without obligation

Type	ASSN 36 STK 30
Part No.	766 326
Nominal voltage (U_N)	1 ... 36 kV
Max. total length ($l_{G,max}$)	2590 mm
Max. load on the operating head	12 / 5 kg
Standard (switching stick heads)	E DIN VDE V 0681-2
Standard (insulating sticks)	E DIN VDE V 0681-1
Standard (switching stick)	E DIN VDE V 0681-1 and -2
Standard (operating stick)	DIN VDE 0682-552
For use in wet weather conditions	Yes
For	Indoor and outdoor installations
Material (insulating stick)	Glass-fibre reinforced polyester tube
Diameter	30 mm
Supporting head for	T pin shaft
Anti-rotation plug-in coupling including end fitting	Yes
Type of device	Operating stick
Weight	4,3 kg
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364137011
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.