


SZ HH W20 1500 (765 052)

- 20° angled operating head for HH fuses that are not easily accessible

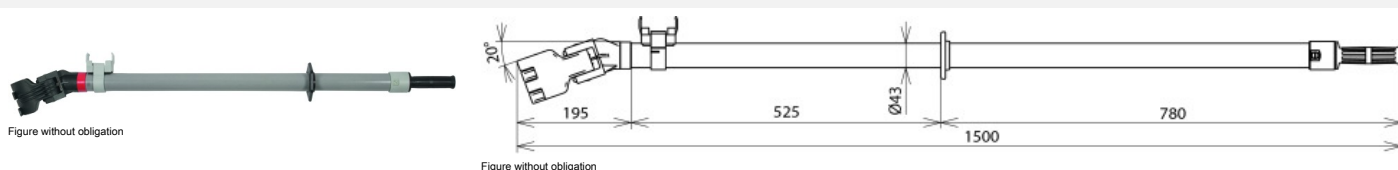

| Type | SZ HH W20 1500 |
|--|--|
| Part No. | 765 052 |
| Nominal voltage (U _N) | 1 ... 36 kV |
| Clamping range | 30 ... 50 ¹⁾ / 50 ... 90 mm |
| Total length (l _g) | 1500 mm |
| Insulating clearance (l _i) | 525 mm |
| Length (handle) (l _h) | 780 mm |
| Insertion depth (l _o) | 195 mm |
| Standard | DIN VDE V 0681-3 |
| For use at | * |
| For | Indoor and outdoor installations |
| Design | 20° angled clamp body |
| Material (insulating stick) | Glass-fibre reinforced polyester tube |
| Material (operating head) | Glass-fibre reinforced polyamide |
| Material (reducing insert) | Polyamide |
| Material (adjustable handle) | Polyamide |
| Diameter | 43 mm |
| Colour | Grey ● |
| Anti-rotation plug-in coupling including end fitting | No |
| Type of device | Fuse tong |
| Weight | 2,59 kg |
| Customs tariff number (Comb. Nomenclature EU) | 85389099 |
| GTIN | 4013364093805 |
| PU | 1 pc(s) |

¹⁾ Only if used with reducing insert

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.