

IS 36 SK 1500 (766 002)

- For use as switching, operating and earthing stick
- Handle closed with end cap



Figure without obligation

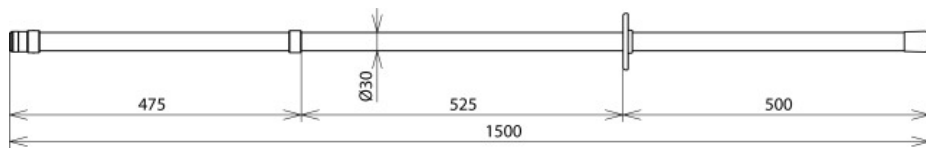


Figure without obligation

Type	IS 36 SK 1500
Part No.	766 002
Nominal voltage (U _N)	1 ... 36 kV
Total length (l _∅)	1500 mm
Insulating clearance (l _i)	525 mm
Handle length (l _h)	500 mm
Insertion depth (l _o)	475 mm
Standard (insulating stick)	E DIN VDE V 0681-1
For	Indoor and outdoor installations
Material	Glass-fibre reinforced polyester tube
Diameter	30 mm
For use at	*
Supporting head for	Hexagon shaft
Anti-rotation plug-in coupling including end fitting	No
Type of device	Insulating stick
Weight	810 g
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364017832
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.