


## IS 36 SQ STK 1000 (766 301)

- For use as switching, operating and earthing stick
- Handle closed with plastic plug-in coupling for extending the handle

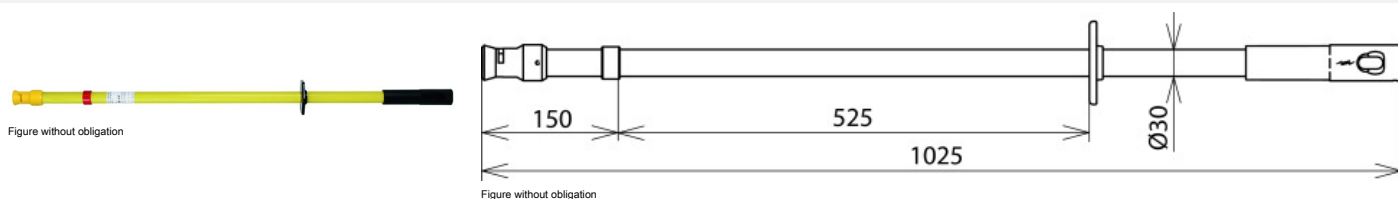

Type	IS 36 SQ STK 1000
Part No.	766 301
Nominal voltage (U <sub>N</sub> )	1 ... 36 kV
Max. load on the operating head <sup>*)</sup>	17 kg
Total length (l <sub>c</sub> )	1025 mm
Insulating clearance (l <sub>i</sub> )	525 mm
Handle length (l <sub>h</sub> )	350 mm
Insertion depth (l <sub>o</sub> )	150 mm
Standard (insulating stick)	E DIN VDE V 0681-1
For	Indoor and outdoor installations
Material	Glass-fibre reinforced polyester tube
Diameter	30 mm
For use at	*
Supporting head for	T pin shaft
Anti-rotation plug-in coupling including end fitting	Yes
Type of device	Insulating stick
Weight	400 g
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364125124
PU	1 pc(s)

<sup>\*)</sup> Max. shutter weight when inserting insulating protective shutters

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.