

## EKV3+1 120 R VTSY9XH (VTSY9XH)

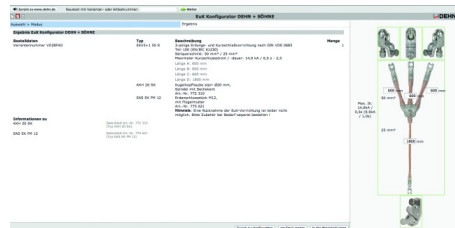


Figure without obligation

Type	EKV3+1 120 R VTSY9XH
Part No.	VTSY9XH
Phase cable end	KKH 20 SK
Earth cable end	EAS EK FM 12
For fixed ball point Ø	20 mm
Cable cross-section Cu	120/50 mm <sup>2</sup>
Max. short-circuit current I <sub>k</sub> 0.5 s	33.5 kA
Max. short-circuit current I <sub>k</sub> 1 s	23.7 kA
Standard	EN/IEC 61138 (DIN VDE 0283-3) and EN/IEC 61230 (DIN VDE 0683-100)
Temperature range	-25 °C ... +55 °C
Material (cable)	E-Cu, extra finely stranded and highly flexible
Material (sheath)	Thermoplastic (soft PVC compound YM2)
Weight	6,4 kg
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364163621
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.