

## EKV1+1 25 VF33XR2 (VF33XR2)

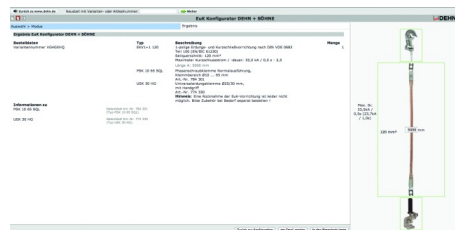


Figure without obligation

Type	EKV1+1 25 VF33XR2
Part No.	VF33XR2
Phase cable end	PSK 4 30 SQL
Earth cable end	EFK FL40 SKN
Clamping range Ø	4 ... 30 mm
Cable cross-section Cu	25 mm <sup>2</sup>
Max. short-circuit current I <sub>k</sub> 0.5 s	7.0 kA
Max. short-circuit current I <sub>k</sub> 1 s	4.9 kA
Standard	EN/IEC 61138 (DIN VDE 0283-3) and EN/IEC 61230 (DIN VDE 0683-100)
Temperature range	-25 °C ... +55 °C
Material (cable)	E-Cu, extra finely stranded and highly flexible
Material (sheath)	Thermoplastic (soft PVC compound YM2)
Weight	10 kg
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364165564
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.