

## EFP 16 RN M12 (790 250)

- Non-cutting formed threaded bushing



Figure without obligation

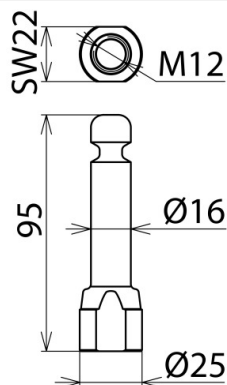


Figure without obligation

Type	EFP 16 RN M12
Part No.	790 250
Dimensions	M12
Diameter	16 mm
Width A/F	22 mm
Max. cable cross-section Cu	150 mm <sup>2</sup>
Max. short-circuit current I <sub>k</sub> 0.5 s	42.0 <sup>*)</sup> kA
Max. short-circuit current I <sub>k</sub> 1 s	29.6 <sup>*)</sup> kA
Standard	EN/IEC 61230 (DIN VDE 0683-100) and DIN 48088-2
Material	Brass (CuNi2Si) / gal Sn
Weight	193 g
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364089495
PU	1 pc(s)

<sup>\*)</sup> For earthing and short-circuiting devices with cable lengths > 4000 mm: 26.5 kA / 0.5 s (18.7 kA / 1 s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.