

PSK 10 85 SQL (784 085)

- For connecting the phase cables of single-pole and three-pole earthing and short-circuiting devices to the overhead line
- PK1 anti-rotation element and long threaded T pin shaft
- Wide clamping range



Figure without obligation

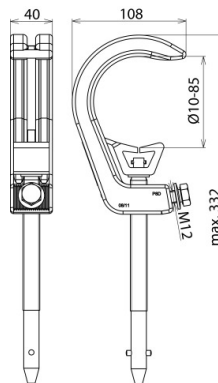


Figure without obligation

Type	PSK 10 85 SQL
Part No.	784 085
Clamping range Ø	10 ... 85 mm
Anti-rotation element	PK2
For cable cross-section Cu	16 ... 150 mm ²
Max. short-circuit current I _k 0.5 s	29.6 kA
Max. short-circuit current I _k 1 s	29.6 kA
Standard	EN/IEC 61230 (DIN VDE 0683-100), threaded T pin shaft DIN 48087
Temperature range	-25 °C ... +55 °C
Material (pressure plate)	Aluminium alloy
Material (clamp body)	Aluminium alloy
Material (shaft)	StSt
Weight	872 g
Customs tariff number (Comb. Nomenclature EU)	85389099
GTIN	4013364018686
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

The clamps must have the same maximum short-circuit current as the earthing and short-circuiting cables!