

# Product Data Sheet: Earthing and Short-Circuiting Devices (fully insulated) for Low-Voltage Cable Distribution Cabinets



## EKS VI 2F KVS SBK (745 901)

- Fully insulated (VI), shock-proof version
- Fully equipped kit for cable distribution cabinets
- Other cable lengths can be selected online via the earthing and short-circuiting configurator



Figure without obligation

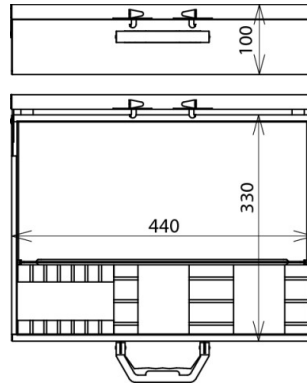


Figure without obligation

<b>Type</b>	<b>EKS VI 2F KVS SBK</b>
<b>Part No.</b>	<b>745 901</b>
Variant No. of EaS device	V162LDM
Dimensions	440 x 330 x 100 mm
Standard	EN/IEC 61230 (DIN VDE 0683-100)
Temperature range	-25 °C ... +55 °C
Weight	6,89 kg
Customs tariff number (Comb. Nomenclature EU)	85369095
GTIN	4013364083530
PU	1 pc(s)

**Attention:** Please state the relevant Variant No. when ordering.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.