

EKV3 35IS ZK VKB2Q6J (VKB2Q6J)

- Other cable lengths can be selected online via the earthing and short-circuiting configurator

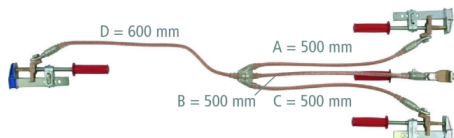


Figure without obligation



Figure without obligation

| Type | EKV3 35IS ZK VKB2Q6J |
|---|---------------------------------|
| Part No. | VKB2Q6J |
| Clamping range | 55 mm |
| Version | Three-pole |
| Cable cross-section (phase side) | 35 mm ² |
| Cable cross-section (earth side) | 35 mm ² |
| Length of phase cable A | 500 mm |
| Length of phase cable B | 500 mm |
| Length of phase cable C | 500 mm |
| Length of earthing cable | 600 mm |
| Fully insulated | No |
| Max. short-circuit current I_k 0.5 s | 10.0 kA |
| Max. short-circuit current I_k 1 s | 6.9 kA |
| Material (clamp body) | MCl/gal Zn |
| Material (pressure plates) | Cu alloy |
| Material (short-circuiting cables) | Cu, highly flexible |
| Standard | EN/IEC 61230 (DIN VDE 0683-100) |
| Temperature range | -25 °C ... +55 °C |
| Weight | 5,58 kg |
| Customs tariff number (Comb. Nomenclature EU) | 85359000 |
| GTIN | 4013364163829 |
| PU | 1 pc(s) |

Attention: Please state the relevant Variant No. when ordering.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

The clamp for the PEN conductor is marked in blue.