

## BEV OL PF K (750 211)

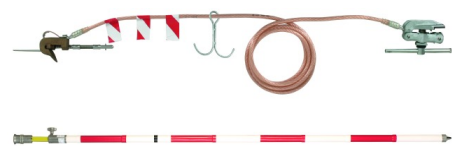


Figure without obligation

Kit includes:		
Type	Part No.	Pos. No.
Tommy bar (K) or ratchet (R)		
EKV K H 50 12000	1x 751 121	<b>1+4+8+11</b>
EKV R H 50 12000	1x 751 122	<b>1+5+8+11</b>
ESTC SQL RW 5000	1x 769 502	<b>12</b>

Figure without obligation

Type	BEV OL PF K
Part No.	750 211
Design	Tommy bar
Type of cable	Single-pole
Cable cross-section (phase side)	50 mm <sup>2</sup>
Cable cross-section (earth side)	50 mm <sup>2</sup>
Length (single-pole cable)	12000 mm
Fully insulated	No
Cable length	12000 mm
Standard	EN/IEC 61230 (DIN VDE 0683-100)
Max. short-circuit current I <sub>k</sub> 0.06 s	34.0 kA
DB drawing No.	3 Ebgw 01.51
DB material No.	237 118
Weight	15,55 kg
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364123809
PU	1 pc(s)

<sup>1)</sup> Profile-free earthing means that the earthing cable can be suspended on the tower thus allowing for limited diesel locomotive operation.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.