

## KS60 12SQ A VNYHZGF (VNYHZGF)

- Short-circuiting bars can be configured online via the earthing and short-circuiting configurator

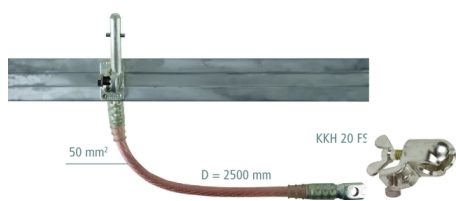


Figure without obligation

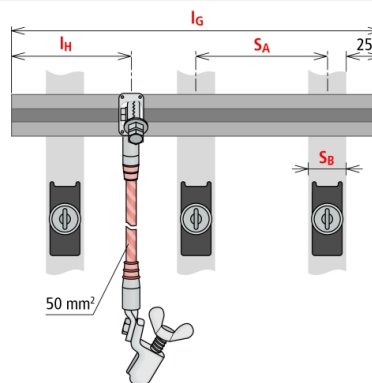


Figure without obligation

Type	KS60 12SQ A VNYHZGF
Part No.	VNYHZGF
Position of the coupling mechanism ( $I_H$ )	200 mm
Profile	60 x 12 mm
Height	60 mm
Width	12 mm
Total length ( $I_G$ )	500 mm
Bar spacing ( $S_A$ )	150 mm
Max. short-circuit current $I_k$ 0.5 s	100 kA
Max. short-circuit current $I_k$ 1 s	70 kA
Standard	EN/IEC 61230 (DIN VDE 0683-100)
Temperature range	-25 °C ... +55 °C
Material (Short-Circuiting Bar)	Aluminium (AlMgSi 0.5)
Material (cable)	Highly flexible copper
Cable cross-section	50 mm <sup>2</sup>
Cable length	2500
Weight	10 kg
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364165366
PU	1 pc(s)

**Note:** When ordering please specify the relevant Variant No.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Two coupling mechanisms are required for a total length > 1000 mm.

**Note:** When ordering, please specify the Variant No. generated online via the earthing and short-circuiting configurator.