

## DG PCB 385 FM (952 714)

- Integration of DEHNguard protection modules in the PCBs of electronic / electrical devices
- Easy and flexible use for all circuit configurations
- Coded base part and protection module ensure against installing an incorrect module

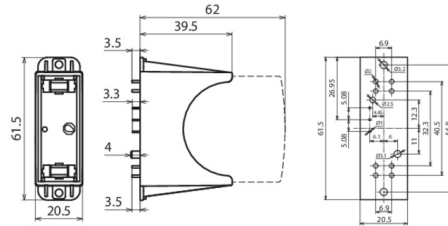


Figure without obligation

Single-pole base for DEHNguard modules to be mounted on the PCBs of devices.

Type	DG PCB 385 FM
Part No.	952 714
Associated protection module	DG MOD 385 (Part No. 952 014)
Max. continuous operating voltage (a.c.) (module)	385 V
Operating temperature range (T <sub>U</sub> )	-40 °C ... +80 °C
Mounting	directly soldered into PCB
Enclosure material	thermoplastic, red, UL 94 V-0
Degree of protection	IP 20 (protection module plugged in)
Type of remote signalling contact	changeover contact
Switching capacity (a.c.)	125 V / 0,1 A
Switching capacity (d.c.)	42 V / 0,5 A; 24 V / 1 A; 12 V / 2 A
Soldering temperature (remote signalling contact)	max. 260 °C / 5 sec.
Weight	18 g
Customs tariff number (Comb. Nomenclature EU)	85366930
GTIN	4013364149854
PU	72 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.