


NEW DG MOD E CI 440 (952 926)


- High discharge capacity due to heavy-duty zinc oxide varistors / spark gaps
- Easy replacement of protection modules due to module locking system with module release button
- The plug-in protection module can be replaced without disconnecting the supply voltage and without removing the distribution board cover



Figure without obligation



Basic circuit diagram DG MOD E CI 440

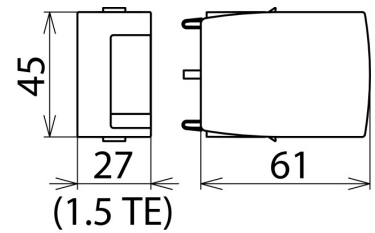

Dimension drawing DG MOD E CI 440

Varistor-based protection module for DEHNguard SE CI 440 FM

Type	DG MOD E CI 440
Part No.	952 926 <small>NEW</small>
Nominal discharge current (8/20 μ s) (I_n)	12.5 kA
Max. continuous operating voltage (a.c.) (U_c)	440 V
Rated varistor voltage (U_{mov})	440 V
Weight	72 g
Customs tariff number (Comb. Nomenclature EU)	85363030
GTIN	4013364322646
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.